

&lt; IDS material &gt;



# KOREAN PATENT ABSTRACTS(KR)

Document Code:A

(11) Publication No.1020000062444 (43) Publication Date. 20001025

(21) Application No.1020000000767 (22) Application Date. 20000108

(51) IPC Code:

F28D 1/03

(71) Applicant:

HALLA CLIMATE CONTROL CORP.

(72) Inventor:

KIM, YONG HO

SHIN, SEUNG HAK


(30) Priority:

1019990011313 19990331 KR

(54) Title of Invention

PLATE FOR STACKED HEAT EXCHANGER WITH IMPROVED HEAT EXCHANGE  
EFFICIENCY AND HEAT EXCHANGER USING SUCH PLATE

Representative drawing

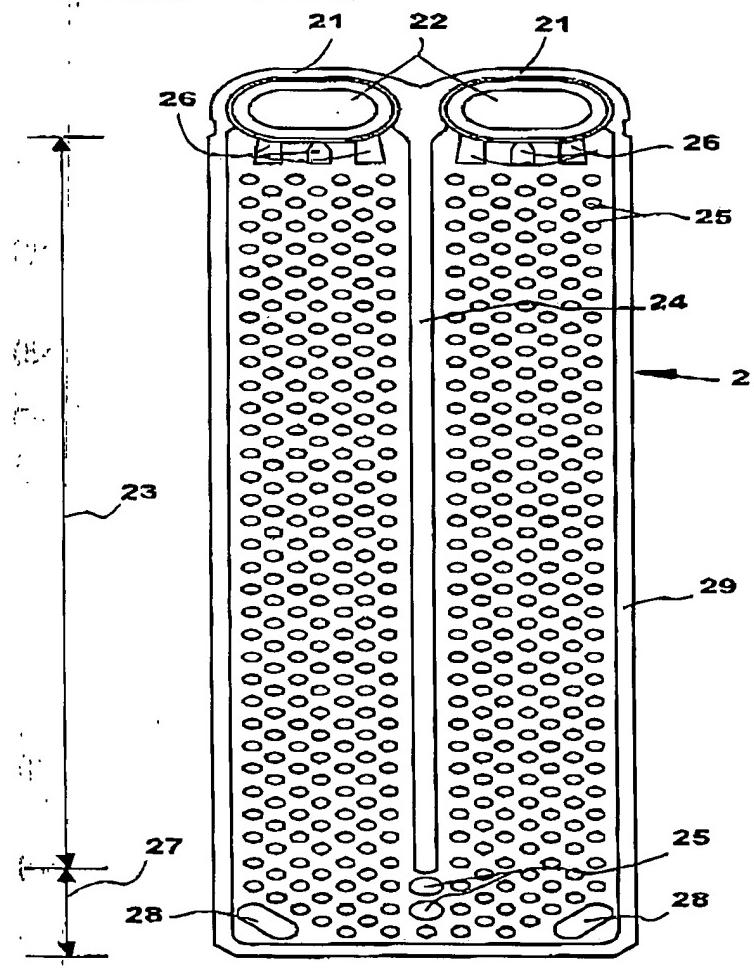

(57) Abstract:

PURPOSE: A plate for heat exchanger and a heat exchanger using such plate are provided to achieve an improved refrigerant flowability, reduced size of a heat exchanger, and seek to an optimum heat exchange performance.

CONSTITUTION: A plate is characterized in that beads(25) in a heat exchange area(23) are uniformly arranged, and a ratio between a space formed by a central line connecting two beads adjacent to each other in widthwise direction and a width of the heat exchange portion is equal to or higher than 0.8 mm and equal to or lower than 1.6mm. A plurality of beads are arranged at a line extended from a lower end of a dividing bead (24) for bi-sectioning the heat exchange portion into right and

left, and two beads accessing the dividing bead are formed larger than other beads. A reinforcing bead(28) is elongated in diagonal direction at both edges of a U-turn portion(27). In a manifold plate, length and width of a slot(22) are shorter than those of others. Three vertical beads(26) are arranged beneath a cup(21) connected to a semi-circular manifold.

COPYRIGHT 2001 KIPO

if display of image is failed, press (F5)